

Large Series

Product Display




Specification


Lock Mechanism	Push Lock Type								
Pin Number	2P	3P	3P	9P	18P	24P	3+9P	3+11P	2+18P
Rated Current	20A		50A	5A			20A+5A		
Rated Voltage	300V			125V			300V		
IP Rating	IP67 Mated								
Mating Cycle	500								
Operating Temperature	-40°C~105°C								
Wire Processing	Soldering / Screw Terminal								
Proposed Wire Gauge/mm²	12AWG / 3.31mm²		9AWG / 8.4mm²	18AWG / 0.75mm²	22AWG / 0.34mm²		(2.5mm2+0.2mm2) / (14AWG+24AWG)		
Proposed Cable Diameter	4.5-6.5mm, 6.5-10.5mm (Field Installable Plug), 13mm Max (Overmold Plug)								
Certification	UL1977, UL2238 for 3P								

Critical Dimension

Panel Cut-Out(Circular & Square & Rhombus Version)

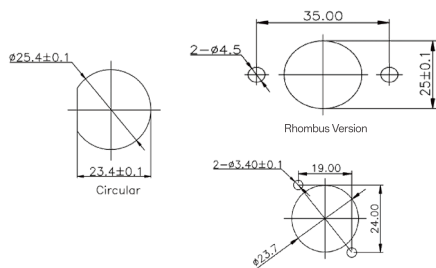

Field Installable Plug



Overmold Plug(Straight & Right Angle Version)

